SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED INPUT POWER	25	W	
MAX INPUT POWER	50	W	
IMPEDANCE	4± 15%	ОНМ	
RESONANT FREQUENCY	35± 20%	Hz	
AVG. SPL 2.83V/0.1M ON 4MM			
THICK PLA PANEL	00	-ID A	
(AVG 20, 40, 80, AND 160 Hz)	80	dBA	
FREQUENCY RANGE	20~ 10,500	Hz	
MAGNET MATERIAL	NdFeB	-	
OPERATING TEMPERATURE	-20~ +60	°C	
WEIGHT	176.8	grams	

THIS DOCUMENT CONTAINS DATA PROPRIE PROJECTS UNLIMITED, INC. ANY USE REPRODUCTION, IN ANY FORM, WITHOUT WRITTEN PERMISSION OF PROJECTS UNLIMIC. IS PROHIBITED.
©2003, Projects Unlimited Inc.


ETARY TO	
E OR	
JT PRIOR	LIK
LIMITED,	-


**REVISION HISTORY** 


DESCRIPTION
RELEASED FROM ENGINEERING

APPROVED DATE 2/20/17





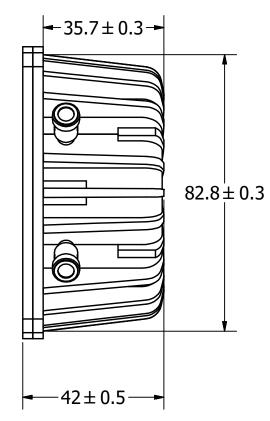

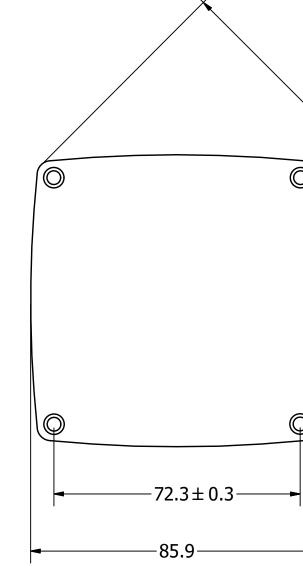

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by	
0. 202	SIZE	M.V.	
DIMENSIONS ARE IN MILLIMETERS,		$\sim$	_
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	<b>A</b> 3		)
ASX08604-SW-R.idw		4	

<b>~~</b>				۸CV	0060	1 (\\/ )	<u> </u>
	M.V.	2/20/2017	M.V.	2/20/2017	B.R.	2/20/2017	2/20/2017
	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date

A3X0000T-3W-IX			
6 L C E ::	Edition	Sheet	
Subwoofer Exciter	-	1/1	