

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20


ALL RIGHTS RESERVED.

LOC

DIST




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REVISED PER ECO-11-005033	16APR2011	RK	HMR
	D2	REVISED PER ECR-13-003041	20FEB2013	E, L	S. Y
	D3	REVISED PER ECR-13-007095	26APR2013	E. L	S. Y

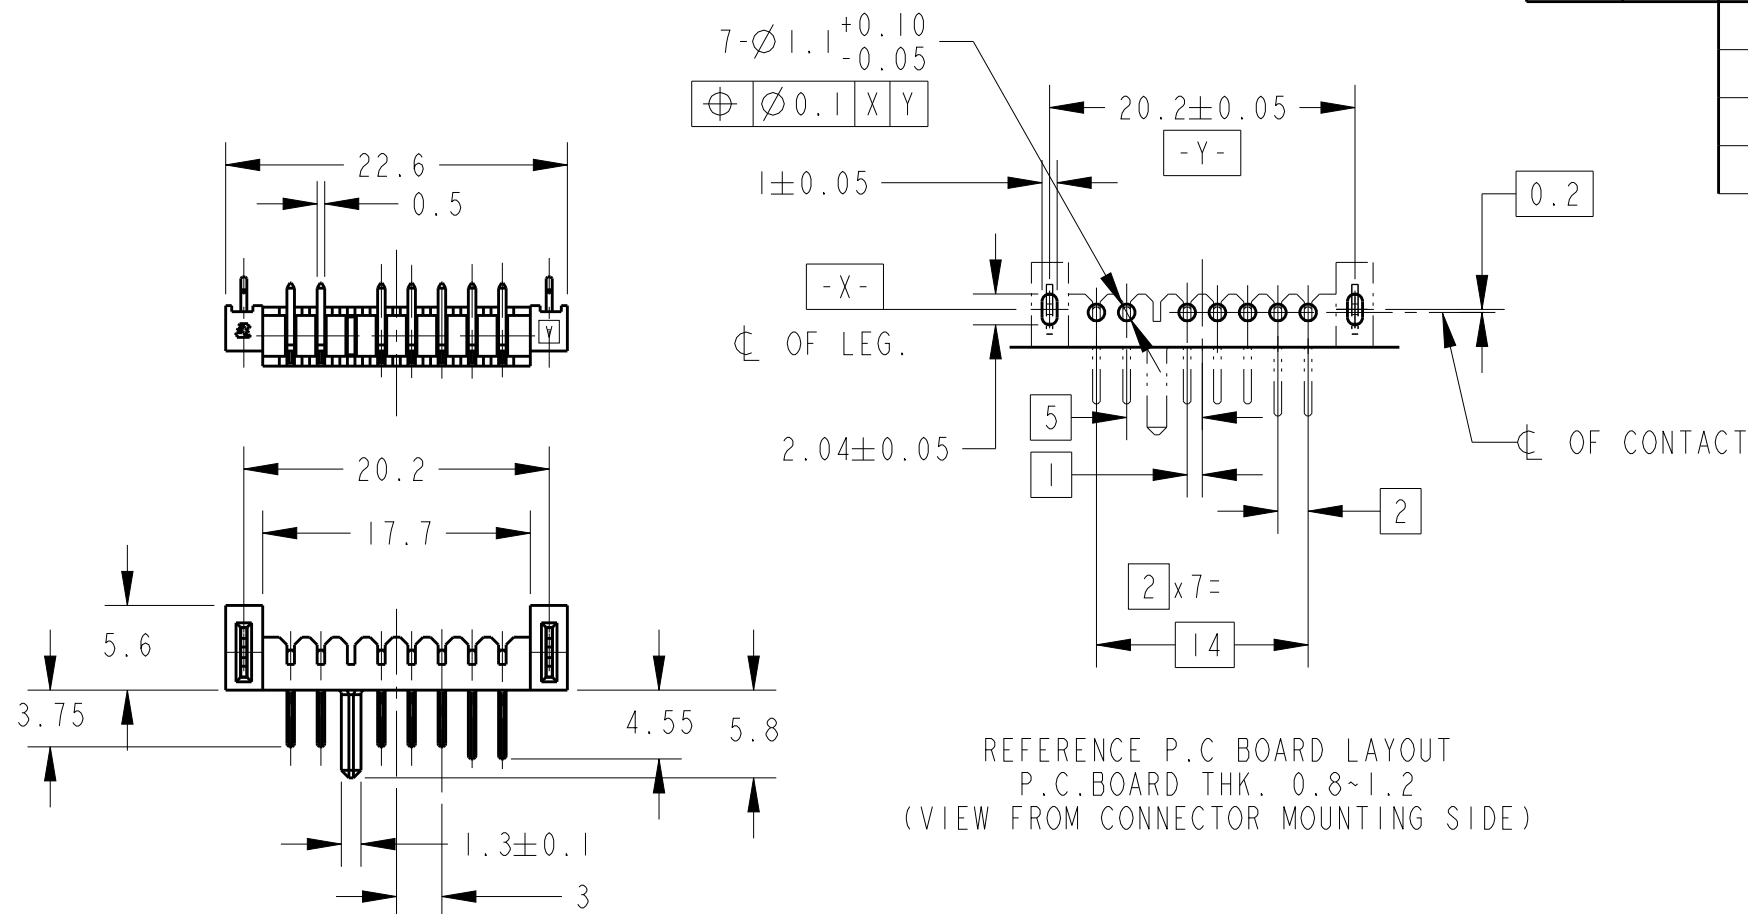


REFERENCE P.C BOARD LAYOUT
P.C. BOARD THK. 0.8~1.2
(VIEW FROM CONNECTOR MOUNTING SIDE)


- 1 MATERIAL
CONTACT: COPPER ALLOY
HOUSING: THERMOPLASTIC RESIN UL94V-0 BLACK
RETENTION LEG: COPPER ALLOY
- 2 FINISH
CONTACT: NICKEL ALL OVER UNDER PLATING,
GOLD PLATING AT CONTACT AREA,
GOLD FLASH PLATING AT LEAD AREA,
RETENTION LEG: NICKEL ALL OVER UNDER PLATING,
TIN PLATING.

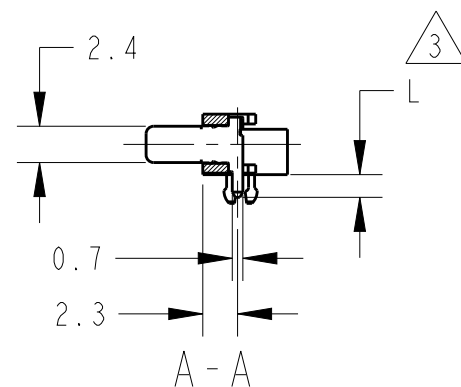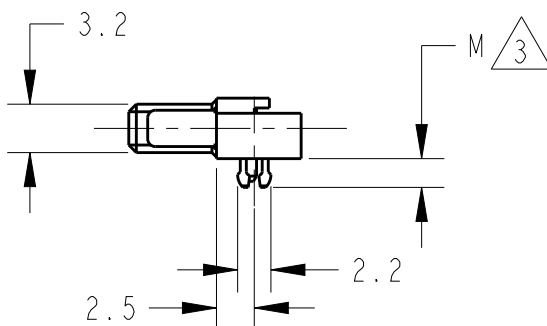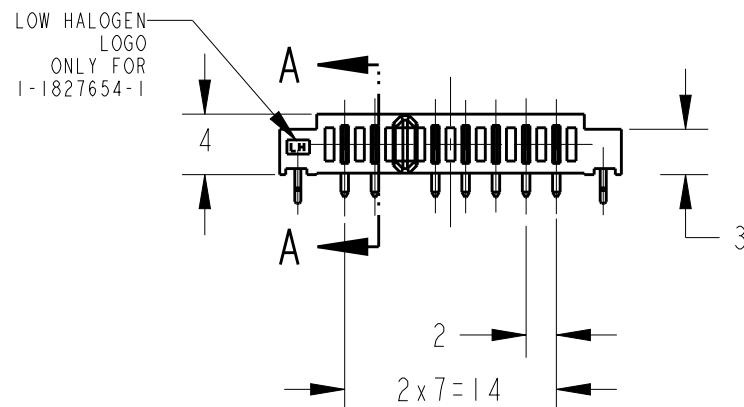

1827654-1, 1-1827654-1: AS SHOWN

THERMOPLASTIC RESIN (LOW HALOGEN: BR<900PPM, CL<900PPM, BR+CL<1500ppm)	1.9	1.5	1-1827654-1
THERMOPLASTIC RESIN	2.6	2.1	1827654-2
THERMOPLASTIC RESIN	1.9	1.5	1827654-1
HOUSING MATERIAL	DIM "M"	DIM "L"	P/N

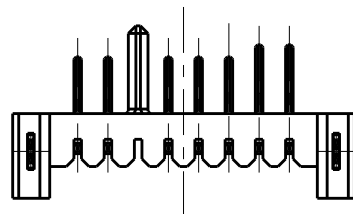

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. KATANO 04JUL05	TE Connectivity			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3	CHK T. KIMURA 04JUL05				
		APVD T. KIMURA 04JUL05				
		PRODUCT SPEC 108-78292	NAME PLUG ASSEMBLY 7POS. 2mm PITCH BATTERY CONNECTOR -			
MATERIAL SEE NOTE		APPLICATION SPEC -				
FINISH SEE NOTE		WEIGHT 1.0g	SIZE A3	CAGE CODE 00779	DRAWING NO C-1827654	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 2:1	SHEET 1	OF 2	REV D3

