






## NOTES:

- 1. CONNECTOR MATERIAL:
  HOUISING:THERMOPLASTIC BLACK UL94 V-0
  SHIELD:Brass
  SHIELD PLATING:NICKEL
  CONTACT:PHOSPHOR BRONZE
  CONTACT PLATING: SELECTIVE GOLD, 30 MICRO-INCHS MIN
  IN CONTACT AREA
- 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
- 3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
- 4. THE PART IS RECOMMENDDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260°C MAX, 10 SECS MAX
- 5. OPERATING TEMPERATURE T=-40°C TO +85°C.
- 6. STORAGE TEMPERATURE  $T=-40^{\circ}C$  TO  $+85^{\circ}C$ .
- 7. PACKAGING INFORMATION: 50 PCS/ TRAY, 1200 PCS/BOX.



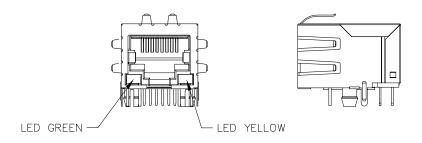




FINAL OUTLINE

@ Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/06/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD0-0015 NL-X1	_	1 OF <b>3</b>	JXD0-0015NL	1





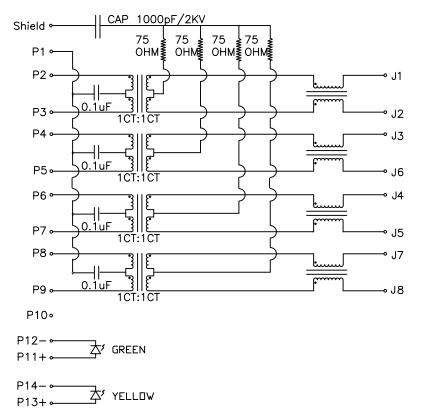

SCHEMATIC

## Electronical Specifications:

1.0 Turn Ratio @100KHz:  $(P9\sim P8):(J1\sim J2) = 1:1\pm 5\%$ 

 $(P7\sim P6):(J3\sim J6) = 1:1\pm 5\%$   $(P5\sim P4):(J4\sim J5) = 1:1\pm 5\%$  $(P3\sim P2):(J7\sim J8) = 1:1\pm 5\%$ 

2.0 Primary Inductance: 350uH MIN @100KHZ, 0.1V 8mA DC BIAS

3.0 DC Resistance: 1.2 OHMS MAX

4.0 Insertion Loss: 1-100MHz -1.0dB MAX

100-125MHz -1.2dB MAX

5.0 Return Loss: 1-40MHz -16dB MIN

40-60MHz -12dB MIN 60-80MHz -10dB MIN

80-100MHz -8dB MIN

6.0 CROSS TALK: 1-100MHz -30dB MIN

7.0 COMMON TO COMMON MODE ATTENUATION: 1-100MHz -30dB MIN

8.0 Isolation: PHY Side to Line Side: 2250VDC

## LED SPECIFICATION


STANDARD LED	WAVELENGTH	Forward Current	Forward V(max)	TYP
GREEN	565nm	20 mA	2.4V	2.2V
YELLOW	590nm	20 mA	2.5V	2.1V


 $\odot$  Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/06/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD0-0015 NL-X1	_	2 OF <b>3</b>	JXD0-0015NL	P1






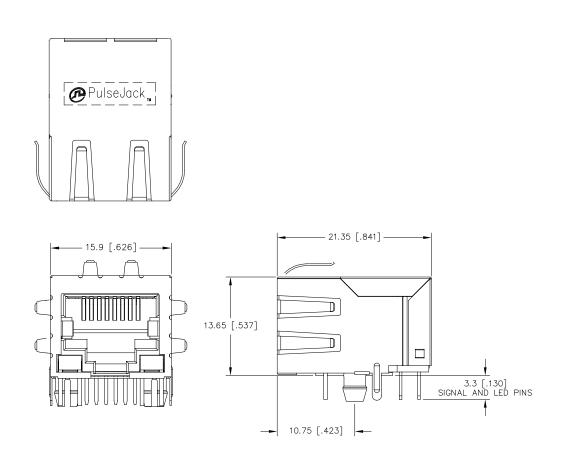

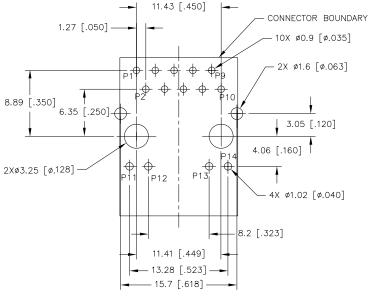

RECOMMENDED PWB LAYOUT (COMPONENT SIDE SHOWN)

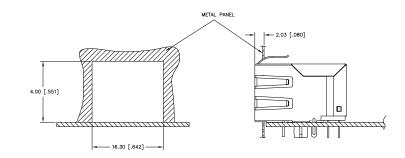

SUGGESTED PANEL CUTOUT

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.  $X.XX = \pm 0.25$  [ $\pm .010$ ]

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (08/06/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD1-0015NL-X1	_	3 OF <b>3</b>	JXD1-0015NL	P1