


Alchip™-MVJ Series

- Endurance : 2,000 hours at 105°C
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS2 Compliant




SPECIFICATIONS

| Items | Characteristics | | | | | | |
|---|---|---------------------------------------|------|---------------------------------------|------|---------------------------------------|------|
| Category Temperature Range | -40 to +105°C | | | | | | |
| Rated Voltage Range | 6.3 to 50V _{dc} | | | | | | |
| Capacitance Tolerance | ±20% (M) (at 20°C, 120Hz) | | | | | | |
| Leakage Current | I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes) | | | | | | |
| Dissipation Factor (tan δ) | Rated voltage (V _{dc}) | 6.3V | 10V | 16V | 25V | 35V | 50V |
| | tan δ (Max.) | 0.30 | 0.24 | 0.20 | 0.16 | 0.14 | 0.12 |
| Low Temperature Characteristics (Max. Impedance Ratio) | Rated voltage (V _{dc}) | 6.3V | 10V | 16V | 25V | 35V | 50V |
| | Z(-25°C)/Z(+20°C) | 4 | 3 | 2 | 2 | 2 | 2 |
| | Z(-40°C)/Z(+20°C) | 12 | 8 | 6 | 4 | 3 | 3 |
| Endurance | The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C. | | | | | | |
| | Rated voltage | 6.3V _{dc} | | 10 & 16V _{dc} | | 25 to 50V _{dc} | |
| | Capacitance change | ≤ ±30% of the initial value | | ≤ ±25% of the initial value | | ≤ ±20% of the initial value | |
| | D.F. (tan δ) | ≤ 300% of the initial specified value | | ≤ 300% of the initial specified value | | ≤ 200% of the initial specified value | |
| | Leakage current | ≤ The initial specified value | | ≤ The initial specified value | | ≤ The initial specified value | |
| Shelf Life | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. | | | | | | |
| | Rated voltage | 6.3V _{dc} | | 10 & 16V _{dc} | | 25 to 50V _{dc} | |
| | Capacitance change | ≤ ±30% of the initial value | | ≤ ±25% of the initial value | | ≤ ±20% of the initial value | |
| | D.F. (tan δ) | ≤ 300% of the initial specified value | | ≤ 300% of the initial specified value | | ≤ 200% of the initial specified value | |
| | Leakage current | ≤ The initial specified value | | ≤ The initial specified value | | ≤ The initial specified value | |


DIMENSIONS [mm]

● Terminal Code : A

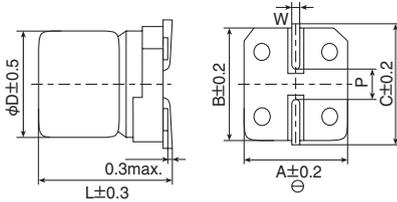

| Size code | D | L | A | B | C | W | P |
|-----------|-----|-----|-----|-----|-----|------------|-----|
| D60 | 4 | 5.7 | 4.3 | 4.3 | 5.1 | 0.5 to 0.8 | 1.0 |
| E60 | 5 | 5.7 | 5.3 | 5.3 | 5.9 | 0.5 to 0.8 | 1.4 |
| F60 | 6.3 | 5.7 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |

PART NUMBERING SYSTEM

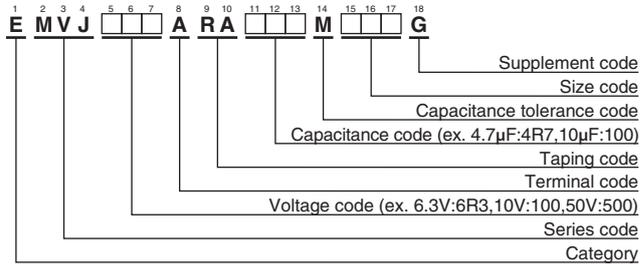

Please refer to "Product code guide (surface mount type)"

MARKING

EX) 6.3V100μF



STANDARD RATINGS

| WV (V _{dc}) | Cap (μF) | Size code | tan δ | Rated ripple current (mA rms/105°C, 120Hz) | Part No. |
|-----------------------|----------|-----------|-------|--|--------------------|
| 6.3 | 22 | D60 | 0.30 | 21 | EMVJ6R3ARA220MD60G |
| | 47 | E60 | 0.30 | 36 | EMVJ6R3ARA470ME60G |
| | 100 | F60 | 0.30 | 56 | EMVJ6R3ARA101MF60G |
| 10 | 33 | E60 | 0.24 | 34 | EMVJ100ARA330ME60G |
| 16 | 10 | D60 | 0.20 | 16 | EMVJ160ARA100MD60G |
| | 22 | E60 | 0.20 | 30 | EMVJ160ARA220ME60G |
| | 47 | F60 | 0.20 | 48 | EMVJ160ARA470MF60G |
| 25 | 33 | F60 | 0.16 | 45 | EMVJ250ARA330MF60G |
| 35 | 4.7 | D60 | 0.14 | 15 | EMVJ350ARA4R7MD60G |
| | 10 | E60 | 0.14 | 25 | EMVJ350ARA100ME60G |
| | 22 | F60 | 0.14 | 40 | EMVJ350ARA220MF60G |
| 50 | 1.0 | D60 | 0.12 | 5.6 | EMVJ500ARA1R0MD60G |
| | 2.2 | D60 | 0.12 | 10 | EMVJ500ARA2R2MD60G |
| | 3.3 | D60 | 0.12 | 14 | EMVJ500ARA3R3MD60G |
| | 4.7 | E60 | 0.12 | 19 | EMVJ500ARA4R7ME60G |
| | 10 | F60 | 0.12 | 29 | EMVJ500ARA100MF60G |

RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

| Capacitance(μF) | Frequency(Hz) | 120 | 1k | 10k | 100k |
|-----------------|---------------|------|------|------|------|
| 1.0 | | 1.00 | 1.50 | 1.75 | 1.80 |
| 2.2 to 10 | | 1.00 | 1.30 | 1.40 | 1.50 |
| 22 to 100 | | 1.00 | 1.05 | 1.08 | 1.08 |

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.