




Date	SYM	REVISION	RECORD	AUTH	DR.	CK.

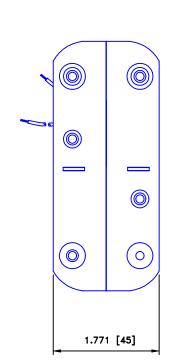

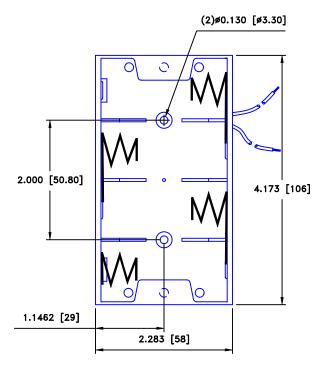

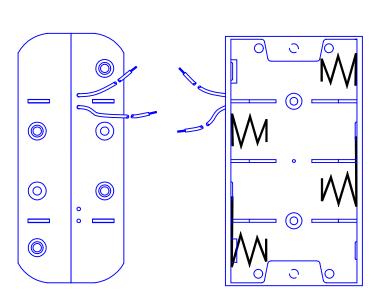

Wire Leads Shown

ORDERING CODE BH48C

SPECIFICATIONS

Plastic material— polypropylene Springs— nickel plated spring steel Wire— 26 AWG, UL1007, CSA Rivets— Brass, nickel plated 9Volt snaps— Brass, nickel plated L-Solder Lugs
W-(6") Wire Leads
SF-9Volt type snaps
B- Bump plates

Tolerance (Except as noted)		Memory Protection Devices, Inc					
(Except as noted)		200 Broad Hollow Road, Farmingdale, New York 11735					
decimal				Scale	Drawn By T.S.		
±.020 (.5)				1=1	Approved By T.B.		
Fractional	Title						
±.030 (.8)	EIGHT "C" CELL HOLDER						
Angular	Date		Drawing Nu	mber			
± 3°	9/20/00		BH48CW				