

## SUMMARY



Image is for illustrative purpose only

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	3T
Termination type	Male solder
IP rating	66
Cable Ø	10.10 - 11.00 mm
Matching parts	PCA.3T.275.CTLY11
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug with cable clamping
Keying	Circular (can rotate), plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	Y11: 10.1 - 11 mm
Variant	

### Performance

Configuration	3T.275 : 1 Coax (75 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

### Specifications


Contact Type:	Solder
Vtest:	(unknown)1200 V (AC), 1690 V (DC)
Impedance:	(unknown)75 Ohm

### Others

Temp (min / max): -55° C / +200° C  
 Humidity (max): <=95% [at 60 deg C /140 F]  
 Vibration: 15 g [10 Hz - 2000 Hz]  
 Shock Resistance: 100 g [ 6 ms]  
 Salt Spray Corrosion: >144 hr  
 Climatological Category: 50/175/21  
 Shielding (min): 75 dB (10 MHz)  
 Shielding (min): 40 dB (1 GHz)  
 IP Rating: 66

## DRAWINGS

### Draws

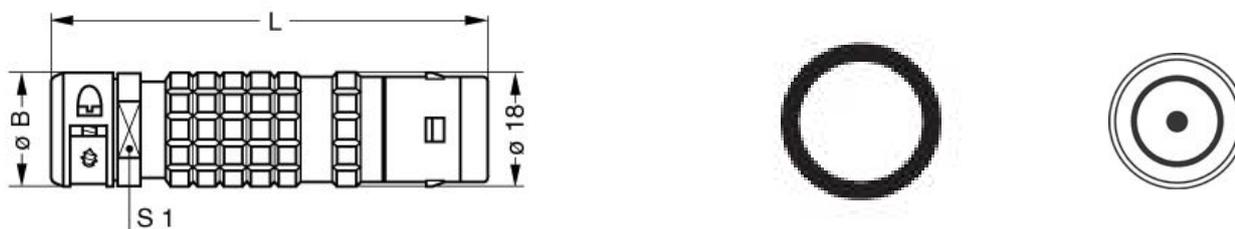

### Dimensions

	B	L	S1
mm.	20	71	18
in.	0,79	2,80	0,71

## RECOMMENDED BY LEMO

### Tools

None

### Cables