

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	10 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	7/16 in.		
Stud Size	1/4 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	N/A		
Panduit Die Index No. on Barrel	N/A		
Alternate Industry Die Index No. () on Barrel	N/A		





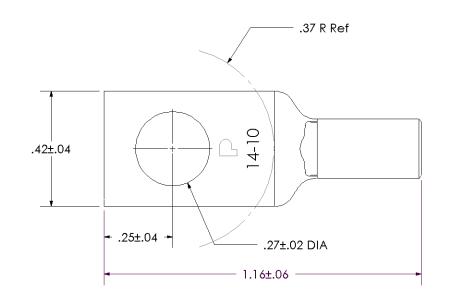

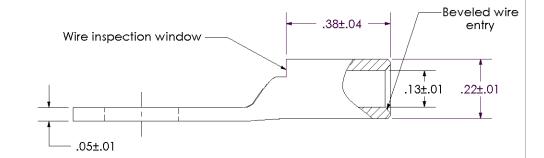

REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE SLCA 10-CUST	
01	9/03	SAC	SAC	WIRE STRIP LENGTH WAS 1/2 in.	11059	Copper Lug - One-Hole, Standard Barrel	
						LCA10-14-L	
						CORP. TINLEY PARK, ILL	INOIS