



RECOMMENDED P.C.B. LAYOUT

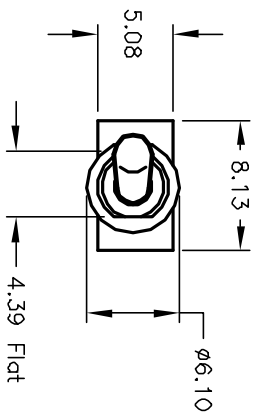


CIRCUIT: SPDT  
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NC/NC	DN
2-3	DPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @120VAC OR 28VDC, 1A @250VAC
5. FIXED TERMINAL & MOVING CONTACT: Copper Alloy w/Gold Plate over Nickel plate.
6. CONTACT RESISTANCE: 20mILLI OHMS max. initial  
@2-4 VDC, 100mA for AG & Au at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -30°C to 85°C
10. DESIGNATE MAJOR DIMENSION

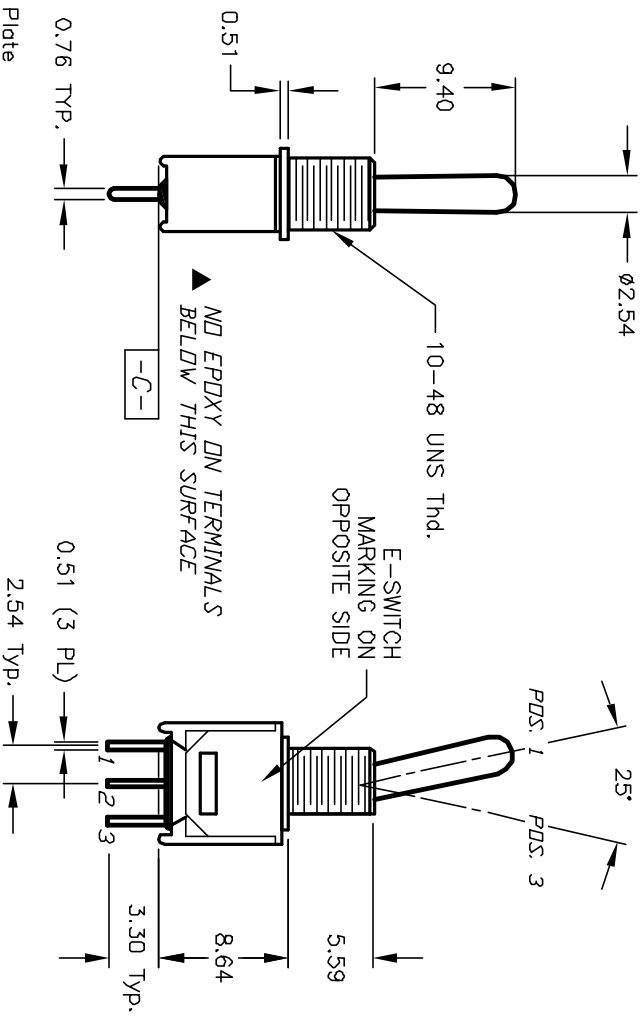

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
A	11592	RELEASED FOR PRODUCTION	8/2/01	CJB
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PREPARED BY E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED				

TITLE		SCALE		DATE	DR	DWG	REV
200 MSP-1 T1 B1 M2 R E		2:1		8/2/01	CJB	T211079	A
<b>E-SWITCH®</b>							